

Ordering information


CLS	512	PM	4	395	CA	-	A	II	3	/J /N /H
										Accuracy
										Exit Cable Length: 1,2,3,4,5,6,7,8,9(m)
										Number of Sliders
										Resolution: A : 1μm B : 0.5μm C : 0.1μm
										Slider Type: Standard CR: Dust Seal
										Cable interface: CA cable ⁽¹⁾ CN: Connector
										Effective Travel:
										PM4 : 45,225,405mm PBX2 : 95,395,695,875,1115,1355mm
										PM6 : 15,195,375mm PBX4 : 35,335,635,815,1055,1295mm
										PAX2 : 90,210,390,690,870,1350mm PBX6 : 275,575,755,995,1235mm
										PAX4 : 30,150,330,630,810,1290mm
										Number of coil assembly : PM : 4,6 PAX : 2,4 PBX : 2,4,6
										Motor Model : PM,PAX,PBX
										Total Length :
										PM4 : 152,332,512mm PBX2 : 230,530,830,1010,1250,1490mm
										PM6 : 152,332,512mm PBX4 : 230,530,830,1010,1250,1490mm
										PAX2 : 220,340,520,820,1000,1480mm PBX6 : 530,830,1010,1250,1490mm
										PAX4 : 220,340,520,820,1000,1480mm
Compact Linear Motor Module										

Customized needs (The meaning of the suffix letter Description)

G : Customer designate lubricant V : High speed requested : 3m/s < V < 9m/s or $a_{max} = 300m/sec^2$ (PM, PAX)
 J : Other customization N : Normal precision grade H : High precesion grade

(1) There are three kinds of CA cable lengths, which are 1(m),2(m) and 3(m).
 If the cable length is over 3(m), we'd suggest CN connector.

Accessory Options

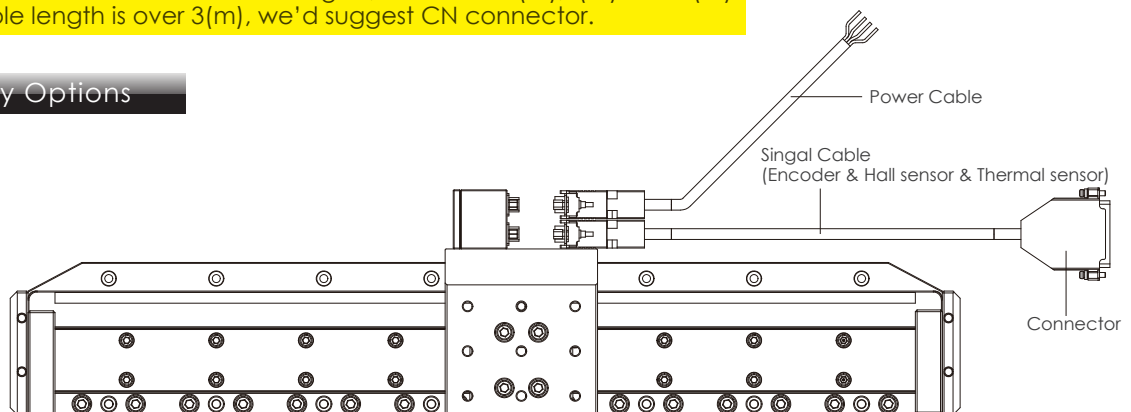

CLS	PM	1	N
			Connector: N:No Connector C:cpc driver connector J: Other customization
			Cable Length: 1,2,3,4,5,6,7,8,9m
			Cable Type : PM:PM power cable PAX:PAX power cable PBX: PBX power cable S: Signal cable
Compact Linear Motor Module			