CPC MSS series measuring system



Data sheet

Pole pitch (mm)

Resolution (µm)

Output signal

Repeatability (µm)

Accuracy (µm / m)


Supply voltage (VDC)

Features

- Easy installation
- Saving space
- Cost effective and reliable
- Dust proof
- Guide rail range: Size 20~55
- One piece length: 4 m Max.


Dimension

Assemble:



Unit: mm

Reader:

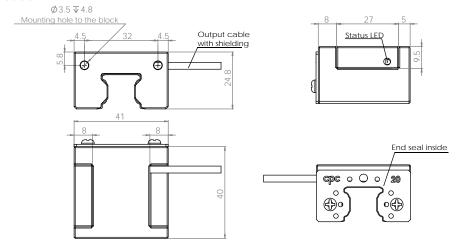

Wiring information

0.5

± 1.5

± 10

5 V TTL

5 ± 10%

colour	signal
blue	GND
red	5V
brown	А
green	Α\
grey	В
yellow	B\
pink	Z
white	Z\

For more details please contact cpc.

* CPC reserves the right to revise any information (technical details)

any time without notice, for printing mistakes or any other incidental

CPC CHIEFTEK PRECISION Co., LTD.

HEADQUARTERS CHIEFTEK PRECISION Co., LTD.

No.3, Dali ist Rd., Sinshih Township, Tainan Science Park, 741-45 Tainan, Taiwan, R.O.C TEL:+886-6-505 5858 Http://www.chieftek.com E-mall:service@mall.chieftek.com

CHIEFTEK PRECISION USA

4881 Murietta Street. Chino, CA. 91710 Tel: +1-909-628-9300 Fax: +1-909-628-7171

cpc Europa GmbH

Industriepark 314, D-78244 Gottmadingen, Germany TEL:+49-7731-59130-38 FAX:+49-7731-59130-28

CHIEFTEK MACHINERY KUNSHAN CO., LTD.

mistakes. We take no responsibility

No.1188, Hongqiao Rd, Kunshan, Jiangsu, P.R. China TEL:+86-512-5525 2831 FAX:+86-512-5525 2851

